

CNK4-L10-S100 - M2 - M100W - B


型號 Model 導程 Lead 行程 Stroke 馬達方向 Motor direction 馬達廠牌及出力 Model brand and output 剎車 Brake

M2 馬達外置 Motor outside position
M3 馬達外置右側 Motor outside ,rightward position
M4 馬達外置左側 Motor outside , left ward position
M6 馬達外置下方 Motor outside ,lower position

H 上銀 Hiwin
X 西門子 Siemens
M 三菱 Mitsubishi
Y 安川 Yaskawa
P 松下 Panasonic
F 富士 Fuji
T 台達 Delta

CNK4規格表(CNK4 Specification)


馬達出力 Step motor output	100W		
重複定位精度 Repeatability(mm)	±0.01		
滾珠絲桿外徑 B.S(Ø)	Ø10		
滾珠螺桿導程 Lead(mm)	2	5	10
最快速度 Maximun speed(mm/sec)	100	250	500
最大載重 Maximum payload(kg)	水平使用 (H)	25	20
	垂直使用 (V)	8	5
額定推力 Rated thrus(N)	424	141	71
行程 Stroke(mm)	100-800 50間隔 (interval)		

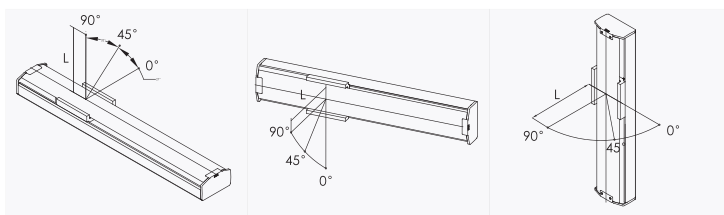

水平安裝應用: 單位Unit:mm Horizontal use					牆面安裝應用: 單位Unit:mm Wall installation use					垂直安裝應用: 單位Unit:mm During vertical use				
導程 Lead	荷重 Payload	0°	45°	90°	導程 Lead	荷重 Payload	0°	45°	90°	導程 Lead	荷重 Payload	0°	45°	90°
Lead 2	12kg	80	505	1000	Lead 2	12kg	1000	70	80	Lead 2	4kg	200	165	200
	18kg	50	355	750		18kg	750	42	50		8kg	100	76	100
	25kg	32	260	500		25kg	500	20	32		-	-	-	-
	10kg	70	270	550		10kg	550	58	72		3kg	200	165	200
Lead 5	15kg	45	187	350	Lead 5	15kg	345	36	45	Lead 5	5kg	120	85	120
	20kg	31	140	250		20kg	250	21	31		-	-	-	-
	8kg	75	130	305		8kg	300	60	75		1.5kg	350	266	350
Lead 10	10kg	57	115	240	Lead 10	10kg	240	44	58	Lead 10	2kg	260	190	260
	12kg	47	90	195		12kg	190	35	47		-	-	-	-

*滑塊表面中心到搬送物重心的距離(僅供參考)
Distance center of slider top to center of gravity of object being transported (For reference only)


靜態容許負載慣量
Stidic Loading Moment




(單位:N.m) (Unit:N.m)
水平使用時 Static Loading Moment

MY	79
MP	79
MR	116


"此款型號不建議當多軸負載軸"
This model suggest not be used as load axis of multi axes.




M2









M3








M4



M6


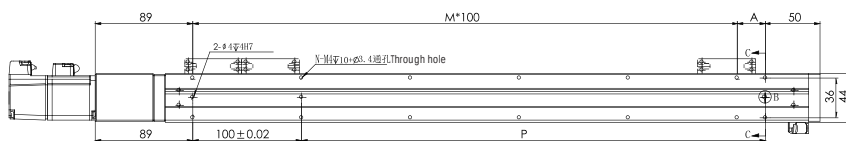


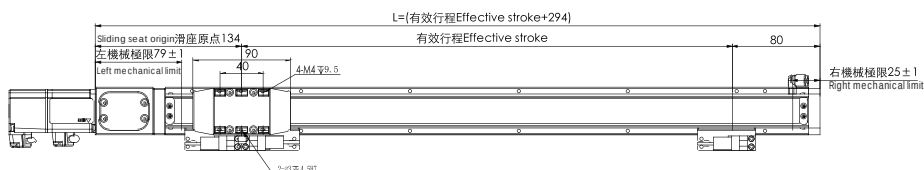



※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.

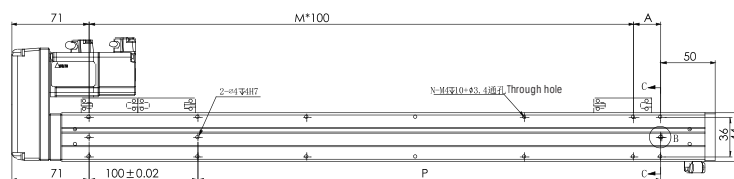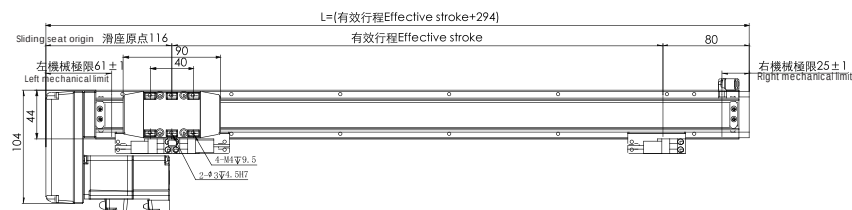

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.







M4

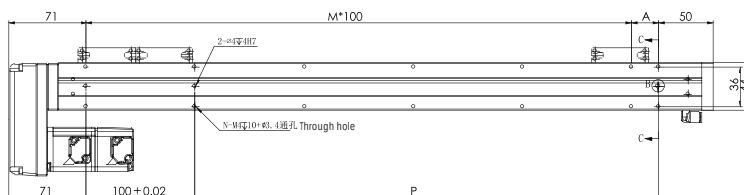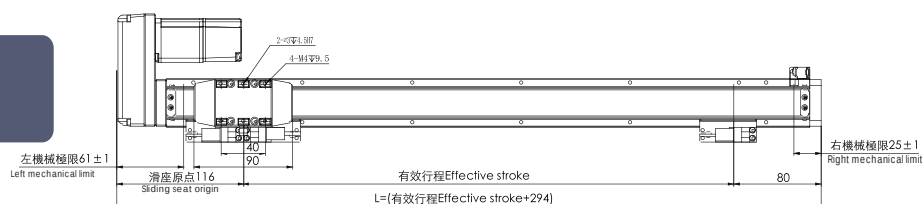

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
重量(kg)	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.

M6

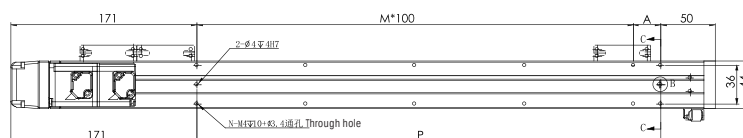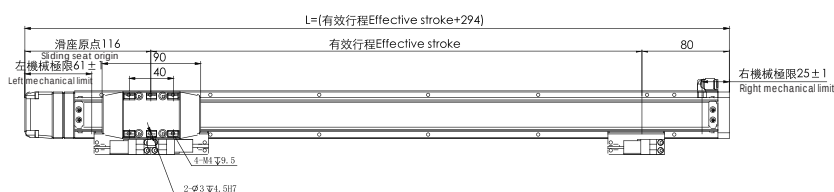

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
重量(kg)	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.