

LNK8 - L6 - S100 - M2 - M200W - B - 3 A

型號
Model

導程
Lead

行程
Stroke

馬達方向
Motor direction

馬達廠牌及出力
Motor brand and output

煞車
Brake

光電位置
Photoelectric position

光電類型
Type of photoelectric

馬達方向 Motor direction

- M2 馬達外置 Motor outside position
- M3 馬達外置右側 Motor outside, rightward position
- M4 馬達外置左側 Motor outside, leftward position
- M6 馬達外置下方 Motor outside, lower position

馬達廠牌及出力
Motor brand and output

- H 匯川 Inovance
- X 西門子 Siemens
- M 三菱 Mitsubishi
- Y 安川 Yaskawa
- P 松下 Panasonic
- F 富士 Fuji
- T 台達 Delta
- S SATA


- 1 - 內置 Inside
- 3 - 外置右側 Outside Right
- 4 - 外置左側 Outside Left
- E/ 空白 - 不含/無指定 Blank - Excluding/Unspecified

- A - NPN
- C - PNP

LNK8規格表(LNK8 Specification):

馬達出力 Step motor output	200W		
重複定位精度 Repeatability(mm)	±0.01		
滾珠絲桿外徑 B.S(Ø)	Ø10		
滾珠螺桿導程 Lead(mm)	6	12	24
最快速度 Maximun speed(mm/sec)	360	720	1440
最大載重 Maximun payload(kg)	水平使用 (H)	80	60
	垂直使用 (V)	15	5
額定推力 Rated thrus(N)	569	284	142
行程 Stroke(mm)	50-1250 50間隔 (interval)		


"此款型號不建議當多軸負載軸"
This model suggest not be used as load axis of multi axes.

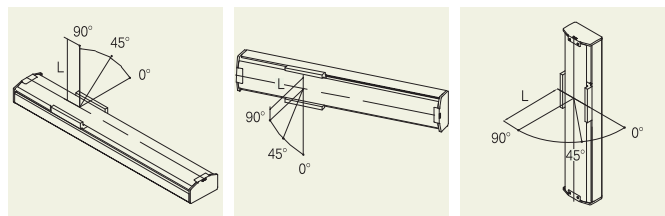

水平安裝應用: 單位Unit:mm Horizontal use					牆面安裝應用:單位Unit:mm Wall installation use					垂直安裝應用: 單位Unit:mm During vertical use				
導程 Lead	荷重 Payload	0°	45°	90°	導程 Lead	荷重 Payload	0°	45°	90°	導程 Lead	荷重 Payload	0°	45°	90°
Lead6	35kg	220	800	1600	Lead6	35kg	1600	1250	220	Lead6	10kg	535	-	535
	45kg	160	600	1210		45kg	1210	550	160		15kg	360	-	360
	80kg	74	310	620		80kg	620	325	74		-	-	-	-
Lead12	10kg	645	1020	2040	Lead12	10kg	2040	700	645	Lead12	3.5kg	1380	-	1380
	30kg	193	311	638		30kg	638	325	193		8kg	605	-	605
	60kg	80	145	283		60kg	283	245	80		-	-	-	-
Lead24	20kg	133	125	253	Lead24	20kg	253	285	133	Lead24	2kg	1380	-	1380
	40kg	55	56	109		40kg	109	230	55		5kg	556	-	556


*滑塊表面中心到搬送物重心的距離(僅供參考)
Distance center of slider top to center of gravity of object being transported (For reference only)

靜態容許負載慣量
Stdc Loading Moment




(單位:N.m) (Unit:N.m)
水平使用時 Static Loading Moment


MY	271
MP	271
MR	449




M2



M3

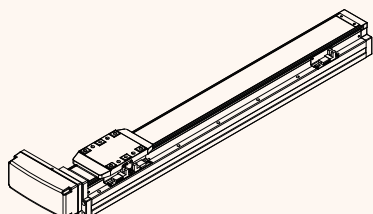


M4



M6


M2

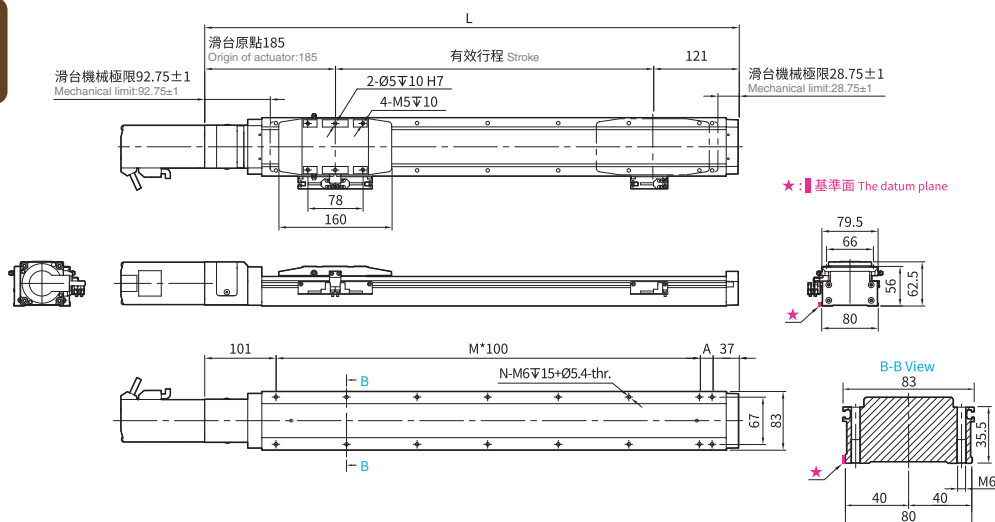

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	356	406	456	506	556	606	656	706	756	806	856	906	956	1006	1056	1106	1156	1206	1256	1306	1356	1406	1456	1506	1556
A	18	80	18	80	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18
M	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14
N	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32
質量(kg)	2.31	2.61	2.9	3.2	3.49	3.79	4.09	4.38	4.68	4.97	5.27	5.57	5.87	6.16	6.46	6.75	7.05	7.35	7.64	7.94	8.24	8.53	8.83	9.13	9.42

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


M3

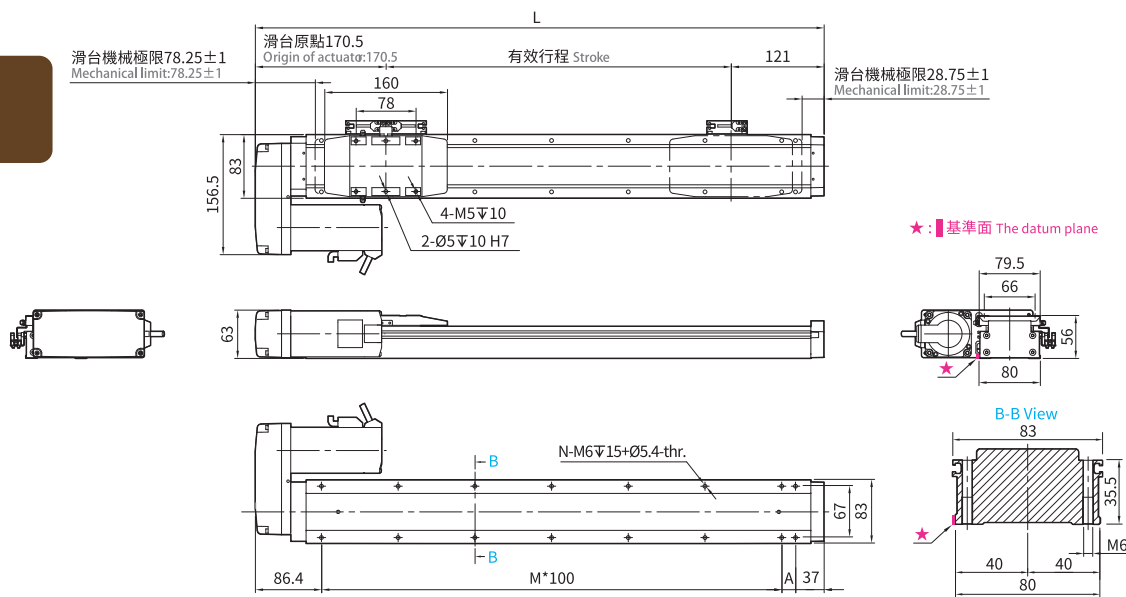

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	341.5	391.5	441.5	491.5	541.5	591.5	641.5	691.5	741.5	791.5	841.5	891.5	941.5	991.2	1041.5	1091.5	1141.5	1191.5	1241.5	1291.5	1341.5	1391.5	1441.5	1491.5	1541.5
A	18	80	18	80	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18
M	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14
N	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32
質量(kg)	2.68	2.98	2.9	3.27	3.87	3.79	4.16	4.46	4.75	5.05	5.35	5.64	5.94	6.24	6.53	6.83	7.13	7.42	8.01	8.31	8.61	8.9	9.2	9.5	9.79

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.


M4

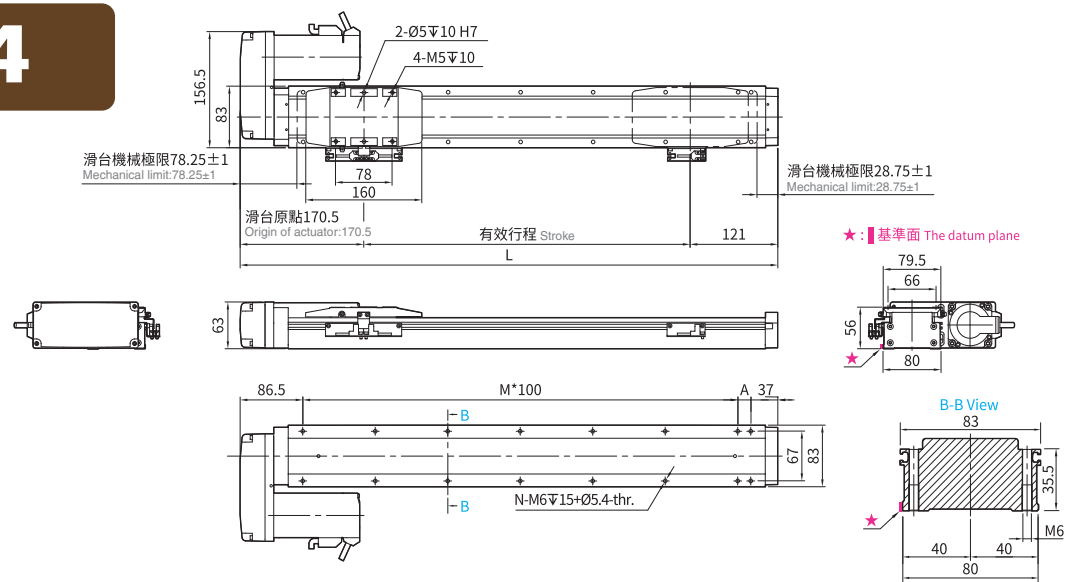

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	341.5	391.5	441.5	491.5	541.5	591.5	641.5	691.5	741.5	791.5	841.5	891.5	941.5	991.2	1041.5	1091.5	1141.5	1191.5	1241.5	1291.5	1341.5	1391.5	1441.5	1491.5	1541.5
A	18	80	18	80	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18
M	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14
N	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32
質量(kg)	2.68	2.98	2.9	3.27	3.87	3.79	4.16	4.46	4.75	5.05	5.35	5.64	5.94	6.24	6.53	6.83	7.13	7.42	8.01	8.31	8.61	8.9	9.2	9.5	9.79

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.

M6

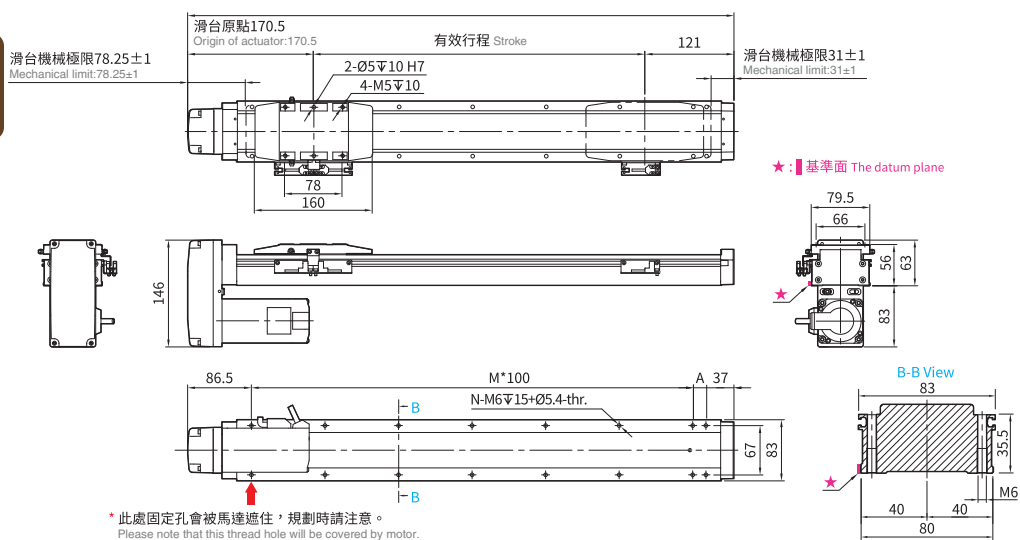

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	341.5	391.5	441.5	491.5	541.5	591.5	641.5	691.5	741.5	791.5	841.5	891.5	941.5	991.2	1041.5	1091.5	1141.5	1191.5	1241.5	1291.5	1341.5	1391.5	1441.5	1491.5	1541.5
A	18	80	18	80	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18	68	18
M	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14
N	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30	32
質量(kg)	2.68	2.98	2.9	3.27	3.87	3.79	4.16	4.46	4.75	5.05	5.35	5.64	5.94	6.24	6.53	6.83	7.13	7.42	8.01	8.31	8.61	8.9	9.2	9.5	9.79

※本公司享有變更規格之權益，恕不另行通知 ※Drawings and specifications are subject to change without prior notice.